

Riding lamp (LED)

LRL-W4

Specifications

Input Voltage(V)	AC 90 ~ 250 DC 100-250
Power factor	Over 0.95
Power consumption(W)	8.3
Luminous flux(lm)	Over 320
Color Temperature(K)	3000
CRI(Ra)	80
Protection	IP56
Body material	Aluminum
Dimension(mm)	132 x 123
Net weight(Kg)	1.1 max

Applications

- External and Internal overhead lights

Standards

- KS
- IEC
- CE




Pictures



LRL-W4W

LRL-W4R

Dimension & photometrics

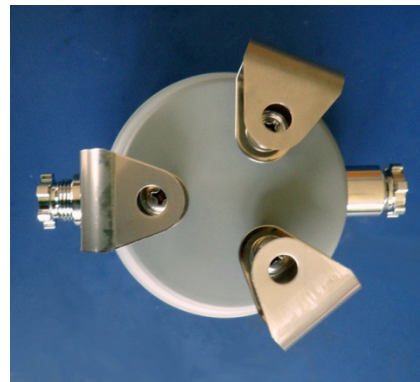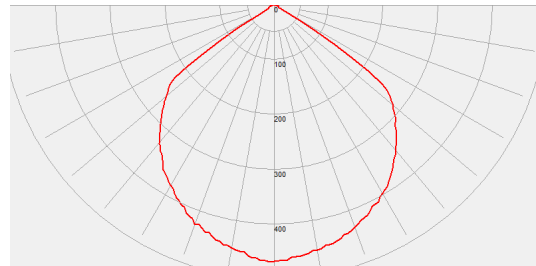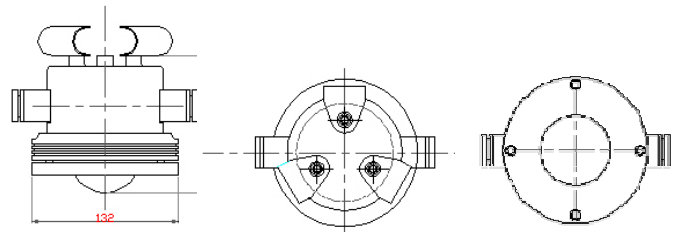

Korea EMI Technologies co.,ltd

Address 652-3, Jangam-ri, Majang-myeon, Icheon city, Korea, Tel. +82-31-633-1918 Fax. +82-31-633-1928

E-mail : ykl@emitech.co.kr

Homepage <http://www.emitech.co.kr>

Emergency Lantern (LED)

LEL-3

Specifications

Input Voltage(V)	AC 90-250 DC 110-340
Back-up	Li-ion Battery
Power Consumption(W)	3.0
Intensity	9,900 cd @0 °
Illumination time	Min. 8 Hours
Beam Angle	4 °
LED status indicator	Red/ Green
Toggle switch	Test/Off/Charge
Body material	BMC
Protection	IP56
Dimension(mm)	145 x 127 x 113
Net weight(Kg)	1.8 / 2.1

Standards applied

- KS-C-IEC
- MIL-STD
- ASTM

Pictures




LEL-3F




LEL-3P



Dimension and photometrics

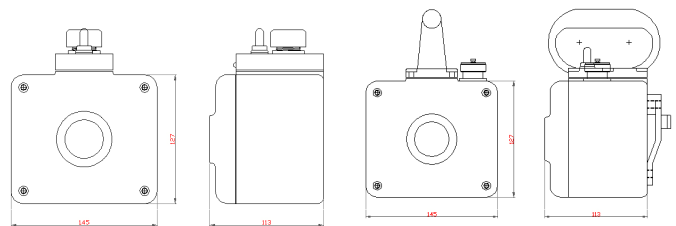

Polar Distribution

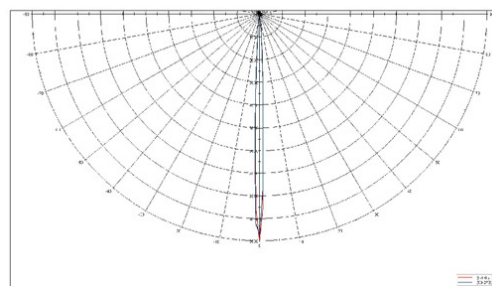

Korea EMI Technologies co.,Ltd

Address 652-3, Jangam-ri, Majang-myeon, Icheon city, Korea, Tel. +82-31-633-1918 Fax. +82-31-633-1928

E-mail : ykl@emitech.co.kr

Homepage <http://www.emitech.co.kr>

Navy Light(LED) Multi purpose (Submarine)

LSS-W10/20

Specifications

Input Voltage(V)	AC 90-250 DC 100-250
Power factor	Over 0.9
Power consumption(W)	<10 / <20
Luminous flux(lm)	1000 +/- 2000 +
Color temperature(K)	5000
Beam angle	130 °
ESD sensitivity	±5000V HBM
Toggle switch	10W/20W/OFF
Body material	Aluminum
Protection	IP56
Dimension(mm)	362 x 119 x 97
Net weight(Kg)	2.8


Standards applied

- KS-C-IEC
- MIL-STD
- ASTM

Pictures



Dimension & photometrics

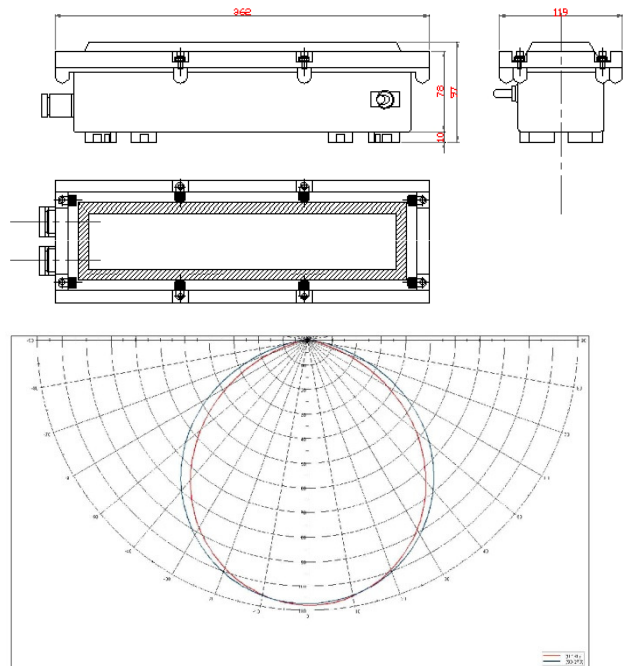

Korea EMI Technologies co.,Ltd

Address 652-3, Jangam-ri, Majang-myeon, Icheon city, Korea, Tel. +82-31-633-1918 Fax. +82-31-633-1928

E-mail : ykl@emitech.co.kr

Homepage <http://www.emitech.co.kr>